

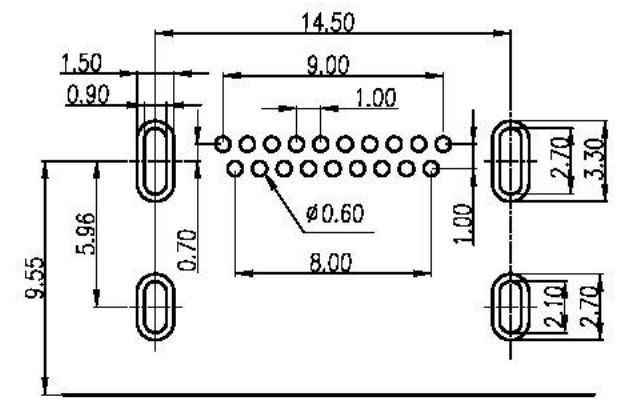
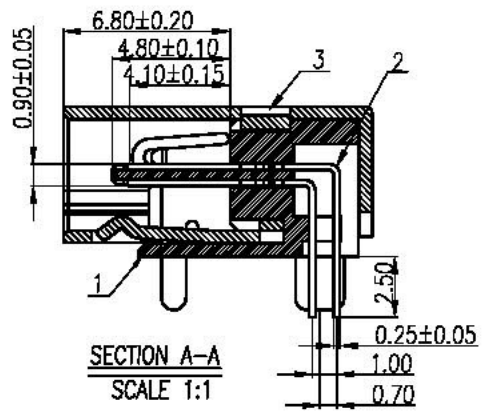
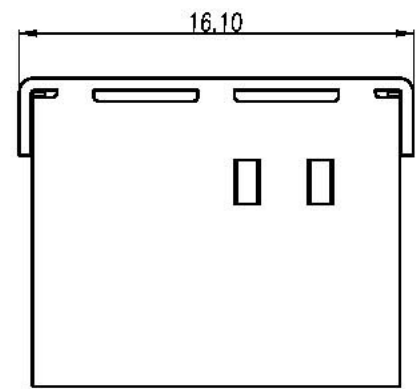



REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

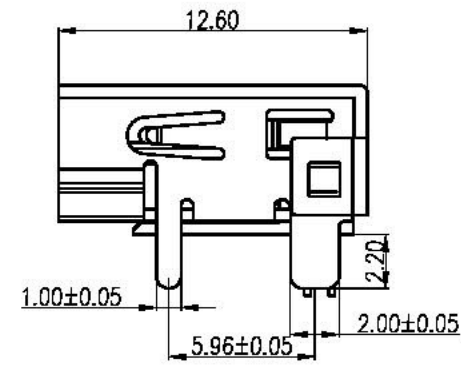

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE  $\pm 0.05$   
 $T=1.6\pm 0.15$

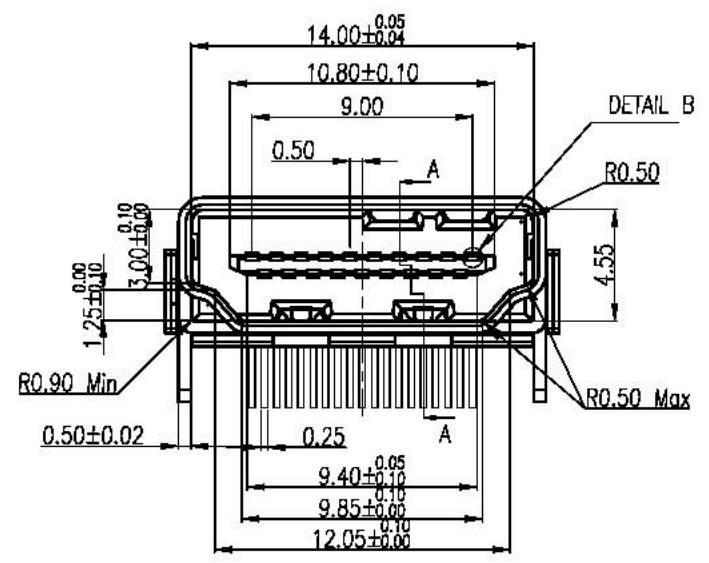

- Note:
- Material:
    - Insulator: Thermoplastic UL94V-0 color:back.
    - Contact: Phosphor bronze  $T=0.25\text{mm}$ .
    - Shell: Brass,  $t=0.50\text{mm}$ .
  - Specification:
    - Current rating: 0.5 A Max.
    - Voltage rating: 40V AC(rms) Max.
    - Contact resistance: 50 milliohms Max.
    - Dielectric withstanding voltage: 100V(ac) for 1 min.
    - Insulation resistance: 1000 M $\Omega$  Min.
    - Operation temperature range:  $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$

PART NO:		MATERIAL:		CHANG ENN CO., LTD.	
MODEL NO:		FINSH:			
UNIT: mm	SIZE: A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: 06/04/28		HDMI-19PIN(F) 90° DIP	
.x	$\pm 0.2$	CHK: 06/04/28		DWG NO: PND32-03	
.xx	$\pm 0.10$	APP: 06/04/28		SCALE: 3:1	
.xxx	$\pm 0.05$			SHEET: 1 of 2	
ANG.	$\pm 1^{\circ}$			REV: A0	