

SECIFICATION

INSULATION RESISTANCE : 1000 MEGOHM MIN.




CONTACT RESISTANCE : 20 MILLIOHM MAX.

WITHSTANDING VOLTAGE : 500V AC/MINUTE

TEMPERATURE RATING : -55°C TO + 105 °C.

MATERIAL : INSULATOR GRASS FILLED PBT (UL 94V-0).

CONTACTS PLATING : GOLD FLASH.

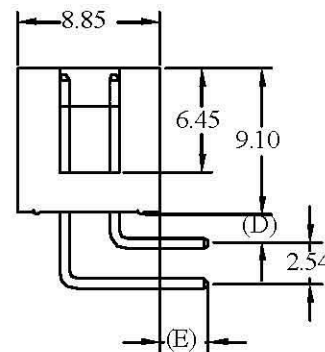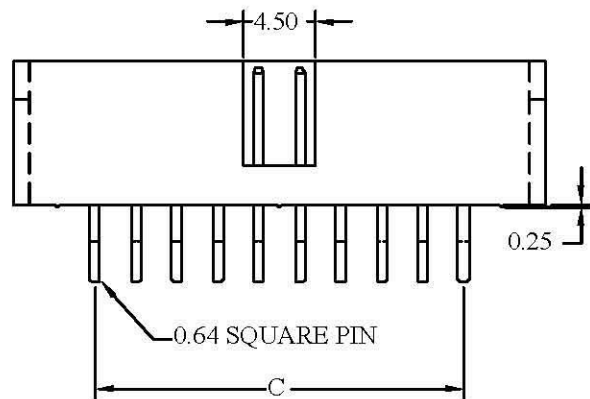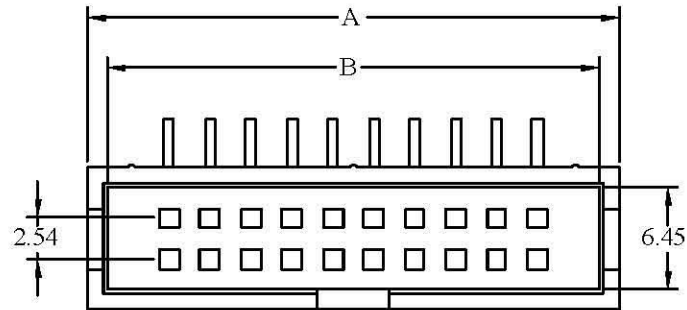

CONTACTS	DIMENSIONS		
	A	B	C
06	15.24	12.70	5.08
08	17.78	15.24	7.62
10	20.32	17.78	10.16
14	25.40	22.86	15.24
16	27.94	25.40	17.78
20	33.02	30.29	22.86
26	40.64	38.10	30.48
30	45.72	43.18	35.56
34	50.80	48.26	40.64
40	58.42	55.88	48.26
50	71.12	68.58	60.96
60	83.82	81.28	73.66
64	88.90	86.36	78.74

長榮有限公司
Chang Enn Co., Ltd.

No. 410, Fu-Teh 1st Road,
Shijr, Taipei County 221
Taiwan, R. O. C.

TEL: 886-2-26945824

FAX: 886-2-26946971

TITLE

2.54*2.54m/m (.1*.1)

Box Header

PARTS NO.

PNA33-R

DWG. NO.

PNA33-R

GENERAL TOLERANCE

DIM:

X. ± 0.5

X.X ± 0.25

X.XX ± 0.12

X.XXX ± 0.08

DRAWN

CHECK

APPROVE

SCALE

DATE

DATE

DATE

UNIT

89/01/15

89/01/15

DATE

mm

REV.

00