

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:


- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1.0 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -55°C~+85°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10u",15u",30u".

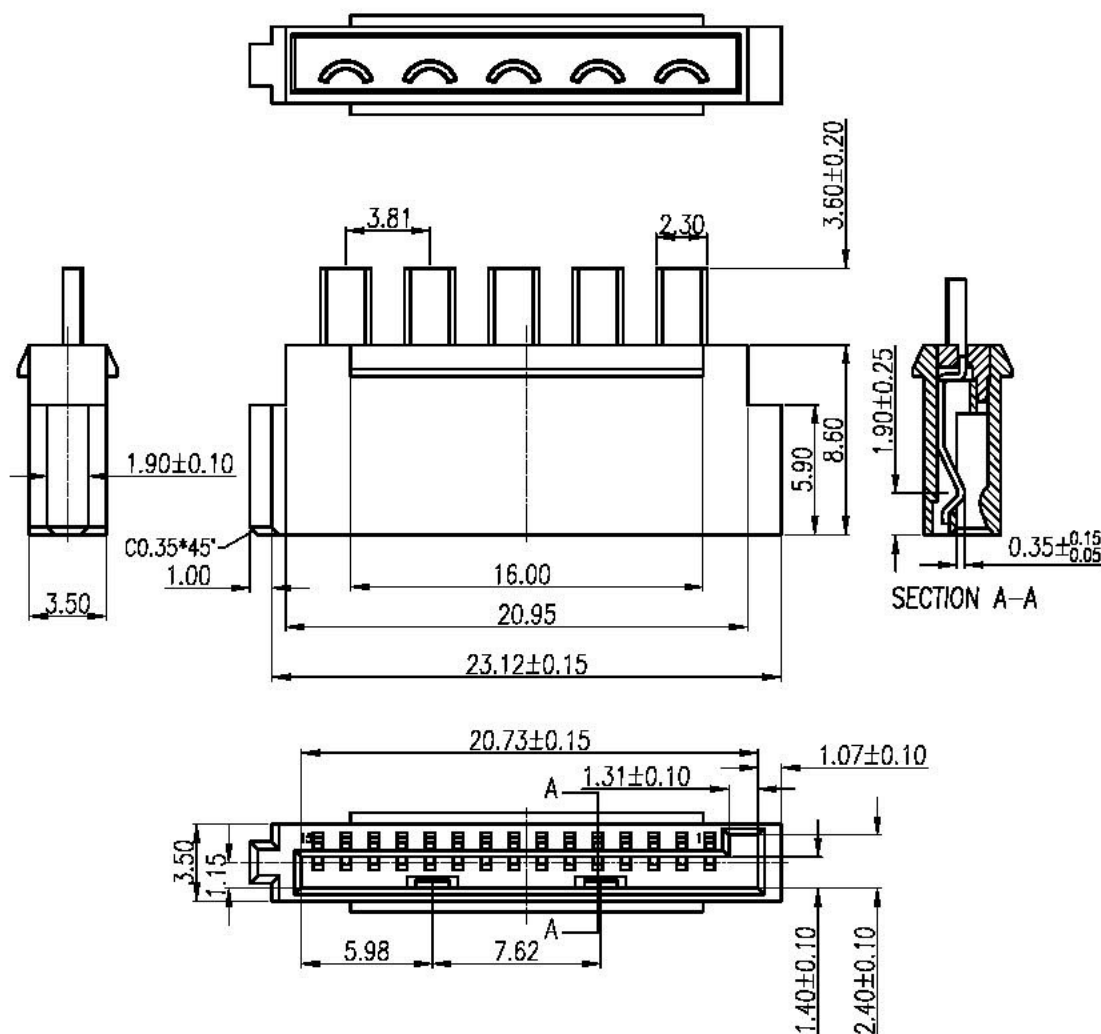

3	Hood	1	P.B.T	UL 94-V0	Black
2	Contact	15	Brass	T=0.30mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

PART NO:	MATERIAL:	CHANG ENN CO., LTD.			
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4	COLOR:	PART NAME:		
TOLERANCE UNspecified	DR:	'08/04/28	SERIAL ATA-15PIN(F)無彈片		
.x ±0.30	CHK:	'08/04/28	DWG NO: PND31-01	REV: AO	
.xx ±0.20	APP:	'08/04/28	SCALE: 3:1	SHEET: 1 of 1	
.xxx ±0.10					
ANG. ±1°					