


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

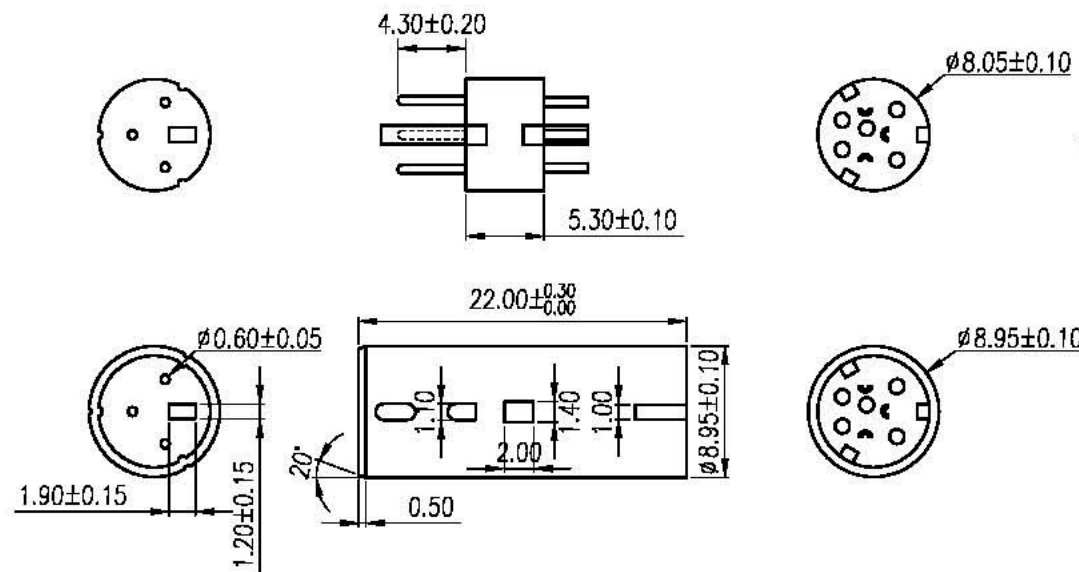

Note:

1. Material:
 - 1.1 Insulator: P.B.T UL 94-V0 rated.
 - 1.2 Contact: Brass, t=0.60mm.
 - 1.3 Shell: Brass, t=0.40mm.
2. Specification:
 - 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
 - 2.5 Total unmating force: 6.0 Kgf Max.
 - 2.6 Total unmating force: 3.0 Kgf Min.
 - 2.7 Temperature range: -55°C~+105°C

3. Finishes:

- 3.1 contacts: Gold flashed or Tin plated 1u", 3u", 5u", 10u", 15u", 30u".
- 3.2 Shell: Nickel plated or Gold plated

ORDER INFORMATION

MD -3 P X
 1 2 3 4

1. MINI DIN: SOLDER TYPE
2. POSITION: 3, 4, 5, 6, 7, 8
3. PLUG

NO. OF CONTACT	3	4	5	6	7	8
PART NO.	MD-3PL	MD-4PL	MD-5PL	MD-6PL	MD-7PL	MD-8PL
POSITION						

3	Shell	1	Brass	T=0.40mm	Nickel/Gold Plated
2	Contact	3~8	Brass	T=0.60mm	Gold Flashed/Tin Plated
1	Housing	1	P.B.T	UL 94-V0	Black/Green/Purple
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:		MATERIAL:		CHANG ENN CO., LTD.	
MODEL NO:		FINISH:			
UNIT: mm	SIZE: A4	COLOR:		PART NAME:	
TOLERANCE UNSPECIFIED		DR: '06/04/05		MINI DIN SOLDER TYPE(M)長銅管	
.x ±0.3	.xx ±0.20	CHK: '06/04/05		DWG NO: PND34-05	REV: A0
.xxx ±0.100	ANG. ±1°	APP: '06/04/05		SCALE: 2:1	SHEET: 1 of 1