


REV.	EDN NO	LOCATIONS	DESCRIPTION	DATE	REWSER	APPD

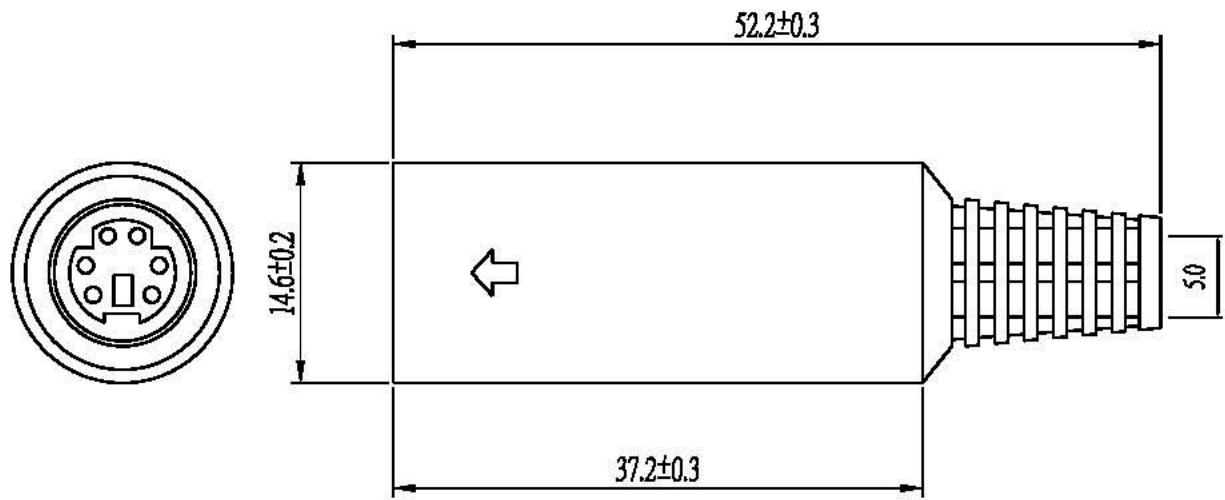

Note:

1.Material:

1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0

1.2 Contact: Copper alloy,t=0.20mm

1.3 Shell: Spcc,t=0.30mm

2.Specification:

2.1 Current rating: 1 A Max.

2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 1000 MΩ Min.

2.5 Total mating force: 3.0 Kgf Max.

2.6 Total unmating force: 0.5 Kgf Min.

2.7 Temperature range: -55°C~85°C

8	Back-shell			
7	Front-shell			
6	Clip			No finish
5	Contact			Selective Au plated on mating area
4	Contact			
3	Contact			
2	Contact			
1	Housing			Black
No.	Name	Qty	Part No.	Finish

NO.OF CONTACT	3	4	5	6	7	8
PART NO.	MD-3S	MD-4S	MD-5S	MD-6S	MD-7S	MD-8S
POSITION						

PART NO:	MATERIAL:	CHANG ENN CO., LTD.			
MODEL NO:	FINISH:				
UNIT: mm	SIZE:	COLOR:	PART NAME: MINI DIN FEMALE ASSEMBLE		
TOLERANCE UNSPECIFIED	DR:	DWG NO: PND34-13			
.X ±0.3	CHK:	SCALE: 2:1	SHEET: 1 of 1	REV: AO	
.XX ±0.20	APP:				
.XXX ±0.100					
ANG. ±1°					