
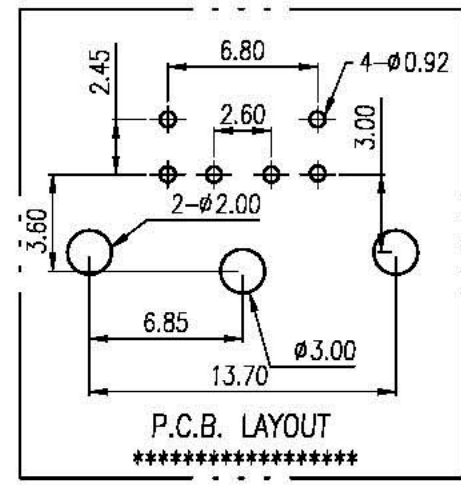
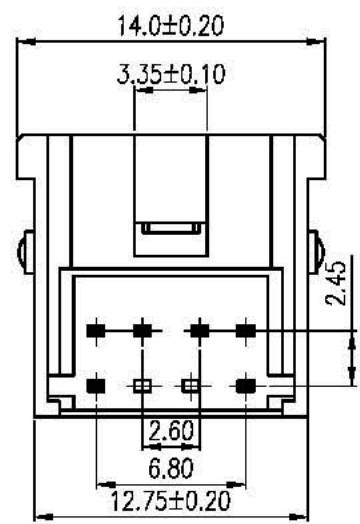
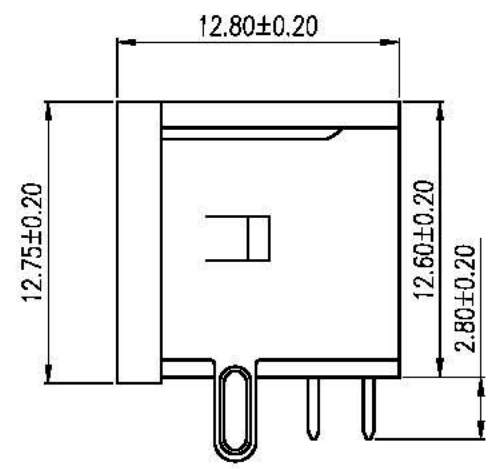


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

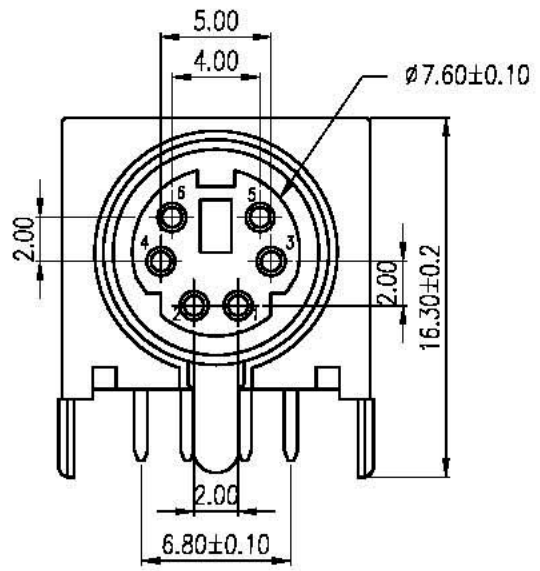

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze,t=0.20mm.
- 1.3 Boardlock: Cold rolled steel,t=0.40mm.
- 1.4 Shell: Brass,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 2.5 Kgf Max.
- 2.6 Total unmating force: 0.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts: Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel plated

4	Boardlock	1	Cold rolled steel	T=0.40mm	Nickel Plated
3	Shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	6	Phosphor bronze	T=0.20mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Green/Purple
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:	MATERIAL:	<b>CHANG ENN CO., LTD.</b>			
MODEL NO:	FINSH:				
UNIT: mm	SIZE: AA	COLOR:	PART NAME:		
TOLERANCE UNSPECIFIED		DR: '06/05/04	MINI DIN RIGHT ANGLE P.B.C 6PIN TYPE(F)半包式		
.x ±0.3	.xx ±0.20	CHK: '06/05/04	DWG NO: PND34-14		REV: A0
.xxx ±0.100	ANG. ±1°	APP: '06/05/04	SCALE: 2:1	SHEET: 1 of 1	